


### Sludge receipt facility Mierlo

WWTP Tilburg, The Netherlands

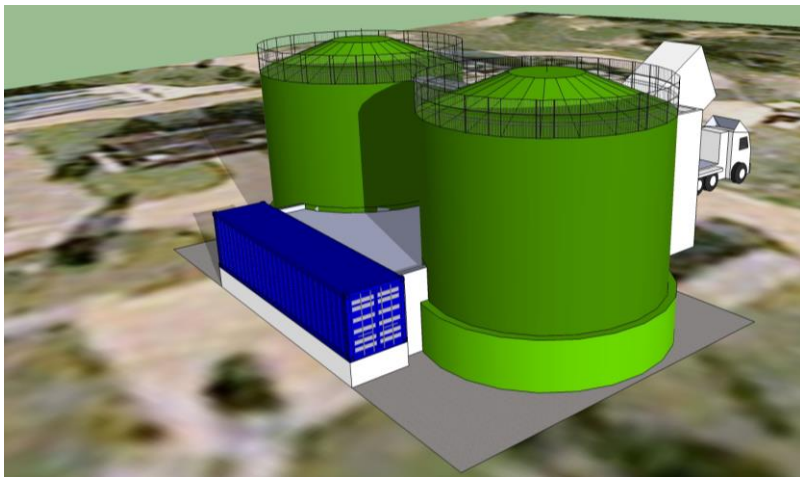

#### Scope of services

- Design and Delivery
- Receipt facility for dewatered sludge
- Cambi feed pump system
- Sludge heating with CIP
- Installation by client

#### Scope of delivery

- Receipt bunker with discharge system
- Screw conveyor to silo's
- Sludge silo 2 x 585m<sup>3</sup> including push floors and screw emptying system
- Cambi feed pumps with inline mixing system for other sludge's
- Sludge heating system for supply of pre-heated blend sludge's
- CIP Clean In Place module
- Piping and valves

#### Features

- This project is part of the realization of the Energy Self Sufficient WWTP Tilburg

#### Technical data

- Receipt of dewatered sludge 20-25% DS
- Blending of sludge's to 16,5% DS (input spec.Cambi)

---

**Client**  
Heijmans Civiel BV, Rosmalen  
The Netherlands

---

**Completion**  
October 2014

---

**Contract value**  
1,3 Mio. €

---